


# DuPont™ Cyrel® 1000 ECDLF

STATE OF THE ART EXPOSURE, DRYER & LIGHT FINISHER

## DuPont Packaging Graphics



DuPont™ Cyrel® 1000 ECDLF

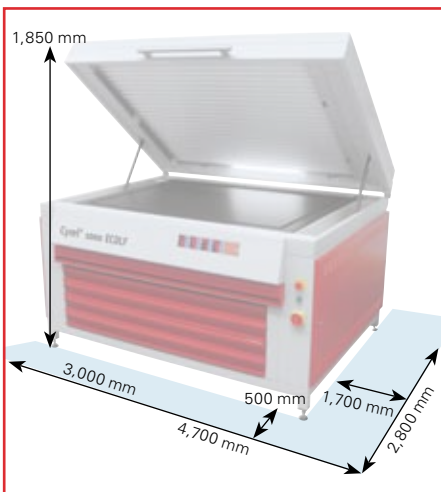

Technical Drawing

DuPont Packaging Graphics is a leading supplier serving the package printing markets with DuPont™ Cyrel® flexographic solutions. The Cyrel® systems for analogue and digital applications, which are available for solvent and thermal processing, comprise sheet photopolymer plates, continuous sleeves, plate making and mounting equipment. DuPont's complete range of equipment is Advancing Flexography for over 30 years. The DuPont™ Cyrel® systems are renowned for their unmatched production performance, for toping plate quality and abridge the overall pre-press workflow.

**The Cyrel® 1000 ECDLF is designed with customer needs in mind, it is easy to install, support, maintain and operate. It is robust, extremely cost effective and reliable.**

### Application

- Maximum plate size 900 x 1,200 mm
- Light intergrator controlled exposure
- Clamshell design
- All-In-One Exposure, Dryer & Light Finisher
- Anodised temperature controlled exposure bed
- Optimum productivity

### Product Features

DuPont™ Cyrel® 1000 ECDLF can exposes, dries, post-exposes and finishes the highest quality photopolymer plates up to a nominal maximum format of 900 x 1,200 mm (36 inch x 48 inch).

The Exposure section is a clamshell design holding 24 UV-A fluorescent tubes with built-in reflectors. One yellow control tube illuminates the exposure bed for inspecting of the plate surface. Unique to this exposure unit is the anodised temperature controlled bed, closed loop system that controls the exposure bed temperature, which translates into predictable and consistent exposures. The unit is fitted with a light integrator that compensates for the decrease in light output as the tubes age. To meet the demanding needs of high quality plates the user can easily customise the 20 basic exposure set-ups.

Each tube is constantly monitored by a photo-sensor. If the light emission of one or more tubes decreases below a set point, the user is alerted. There are 3 counters imbedded in the PLC to keep track of the number of hours the UV-A and UV-C tubes have been in operation.

The 4 dryer drawers are located beneath the Light Finisher section. There is one timer per dryer drawer for regulating the temperature. Automatic blowers on both dryer drawers further control the set temperature. The exhaust airflow is monitored by a safety sensor.

The Post Exposure and Light Finisher section hold 19 UV-C and 20 UV-A tubes. The PLC allows the user to perform post exposure and finishing in a preferred sequence, or simultaneously. The post exposure and finisher section has 20 basic set-ups that can be easily customised by the user.



*The miracles of science™*


Technical Data		
General	Details	Other Notes
Equipment Name	DuPont™ Cyrel® 1000 ECDLF	Cooled exposure, dryer, post exposure and light finisher
SAP Article Number	D11552085	
Packing	Crated	
Max. nominal plate width	900 mm – 36 inch	
Max. nominal plate length	1,200 mm – 48 inch	
UV-A tubes wave length	360 nm – 380 nm	24 tubes (Exposure) 20 tubes (Light Finisher)
UV-C tubes wave length	254 nm	19 tubes (Light Finisher)
Plate thickness	0.5 mm to 7.0 mm	0.019 inch to 0.27 inch
Electrical (field configurable)	370 / 440 Volt – 50 / 60hz * 208 / 240 Volt – 50 / 60hz**	3Ph / N / PE* 3Ph / PE**
Power (nominal)	9.5 kW	
Current (nominal load)	15 Amp @ 400 Volt* 28 Amp @ 230 Volt**	* Connecting wires 5x 2.5 mm <sup>2</sup> for 400 Volt configuration. ** Connecting wires 4x 6 mm <sup>2</sup> for 230 Volt configuration.
Exhaust (Dryer)	Ø 60 mm – 2.36 inch	100 m <sup>3</sup> / h – 58.86 scfm (min)
Exhaust (Light Finisher)	Ø 140 mm – 5.5 inch	800 m <sup>3</sup> / h – 470.9 scfm (min)
Environmental Data	Temperature range 17°C to 28°C – 63°F to 82°F	Relative humidity From 20% to 80% non-condensing
Compressed Air supply	NA	
Dimension L	1,550 mm – 61.1 inch (un-crated)	1,650 mm – 65.0 inch (crated)
W	1,800 mm – 70.9 inch (un-crated)	1,900 mm – 74.8 inch (crated)
H	1,090 mm – 42.9 inch (un-crated)	1,500 mm – 59.1 inch (crated)
H – open	1,850 mm – 72.9 inch (open)	
Weight	650 kg – 1.433 lbs (un-crated)	920 kg – 2.028 lbs (crated)
Colour	DuPont Grey & DuPont Red	

All technical information set out herein is provided free of charge and is based on technical data, which DuPont believes to be reliable. It is intended for use by persons having skill, at their own discretion and risk. The handling precaution information contained herein is given with the understanding that those using it will satisfy themselves that their particular conditions of use present no health or safety hazards. Since conditions of product use are outside of our control we make no warranties express or implied in relation thereto and therefore cannot accept any liability in connection with any use of this information. Nothing herein is to be taken as a license to operate under, or a recommendation to infringe any patents.

Du Pont de Nemours (Deutschland) GmbH  
DuPont Imaging Technologies  
Hugenottenallee 173  
63263 Neu-Isenburg  
Deutschland  
Tel: +49 (0) 6102 18 4400

Du Pont (U.K.) Limited  
DuPont Imaging Technologies  
Wedgwood Way, Stevenage  
Hertfordshire SG1 4QN  
United Kingdom  
Tel: +44 (0) 1438 734485

To learn more, visit [www.cyrel.co.uk](http://www.cyrel.co.uk)  
or contact your Cyrel® specialist



The miracles of science™

DuPont Packaging Graphics

“Advancing Flexography”