


# DuPont™ Cyrel® 2000 PS

## State-of-the-Art Processor



DuPont™ Cyrel® 2000 PS

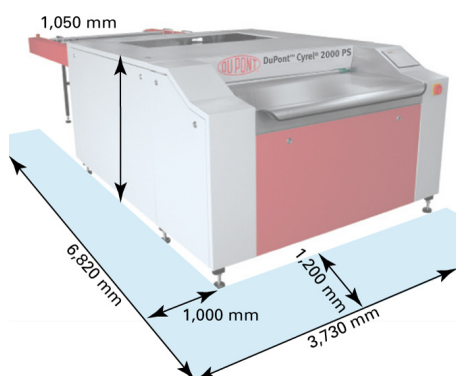

Floor Plan

DuPont Packaging Graphics continues to be a global technology leader in the development and supply of flexographic printing systems. Our R&D team continues to develop innovative new solutions to help our customers expand their business by taking advantage of new and profitable opportunities in the growing flexographic packaging market. The DuPont Packaging Graphics portfolio of products includes DuPont™ Cyrel® brand photopolymer plates (analogue and digital), Cyrel® platemaking equipment, Cyrel® round sleeves, Cyrel® plate mounting systems and the revolutionary Cyrel® FAST thermal system.

DuPont™ Cyrel® Systems: Higher quality at high speed.

**The DuPont™ Cyrel® 2000 PS is designed with customer needs in mind; it is easy to install, support, maintain and operate. It is robust, extremely cost effective and reliable.**

### Benefits

- Maximum plate size 1,070 x 2,000 mm (42" x 78")
- Increased productivity
- Minimal floor space
- Innovative washout process
- High dot resolution and fine line definition
- Integrated viscosimeter
- Robust and easy to support

### Product Features

DuPont™ Cyrel® 2000 PS is capable of processing high quality photopolymer plates up to a format of 1,070 x 2,000 mm (42" x 78").

High dot resolution, excellent line definition, deep reverses and clean floor are achieved to meet the highest Flexo standard irrespective of whether thick, thin, narrow or large plates are being processed.

An innovative washout concept consisting of eight flat brushes transverse to each other, and nine contra-rotating round brushes wash out the non-polymerised parts of the plate. Cleaning takes place through contra-rotating round brushes moistened with fresh solvent, clearing the plate of washout solution.

At the exit section, the plate is pulled over a rotating plush surface and pre-dried. At the same time the relief side can air dry.

The solvent temperature is programmable between 15°C to 30°C (59°F to 86°F) to handle different brands of solvents available to the industry. The speed at which the plates pass through can be preset to adapt to the individual plate types. The integration of fresh solvent is controlled via a viscosimeter, which is constantly monitoring the solvent saturation during the entire process. The unit is operated and controlled through a large colour touch screen panel. The computer control board may store up to 21 different washout plate programs.





# DuPont™ Cyrel® 2000 PS

## State-of-the-Art Processor

Technical Data		
General	Details	Other Notes
<b>Equipment Name</b>	DuPont™ Cyrel® 2000 PS	Incremental solvent processor
<b>SAP Article Number</b>	D14897277	
<b>Plate Thickness</b>	0.5 mm to 7.0 mm	0.019" to 0.27"
<b>Max. Nominal Plate Width</b>	1,070 mm (42")	
<b>Min. Nominal Plate Width</b>	200 mm (7.9")	
<b>Max. Nominal Plate Length</b>	2,000 mm (78.7")	
<b>Fresh Solvent Tank</b>	19 litres (4.2 Gal) UK	
<b>Min. Solvent Volume for Operation</b>	70 litres (15.4 Gal) UK	
<b>Max. Solvent Volume for Operation</b>	90 litres (19.8 Gal) UK	
<b>Max. Tank Volume</b>	115 litres (25.3 Gal) UK	
<b>Electrical (Field Configurable)</b>	380 / 400 Volt – 50 / 60 hz 220 / 230 Volt – 50 / 60 hz	3Ph / N / PE 3Ph / PE
<b>Power (nominal)</b>	7 kW	
<b>Current (Nominal Load)</b>	16 Amp @ 400 Volt 25 Amp @ 230 Volt	
<b>Connecting Wires</b>	400 Volt configuration 230 Volt configuration	5 x 2.5 mm <sup>2</sup> 5 x 2.5 mm <sup>2</sup>
<b>Grounding</b>	≤ 0.1 Ω	Ground bar to equipment frame and to electrical supply ground
<b>Exhaust (Light Finisher)</b>	Ø 100 mm (3.9")	200 m <sup>3</sup> / h–117.7 scfm
<b>Environmental Data</b>	Temperature range: 15°C to 30°C (59°F to 86°F)	Relative humidity from 40% to 60% non-condensing
<b>Compressed Air Supply</b>	6 bar minimum	200 l / min–423.8 ft <sup>3</sup> / hour
<b>Dimensions</b>	<b>Uncrated</b>	<b>Crated</b>
L	4,420 mm (174.0")	4,850 mm (190.9")
W	1,730 mm (68.1")	2,040 mm (80.3")
H	940 mm (37.0")	1,600 mm (62.9")
<b>Weight</b>	1,190 kg (2,624 lbs)	1,740 kg (3,836 lbs)
<b>Colour</b>	DuPont Grey & DuPont Red	

For more information on DuPont™ Cyrel® or other DuPont Packaging Graphics products, please contact your local representative:

DuPont de Nemours (Deutschland) GmbH  
 DuPont Electronics & Communications  
 Hugenottenallee 175  
 63263 Neu-Isenburg  
 Germany  
 Tel: +49 (0) 6102 18 1592

DuPont (U.K.) Limited  
 DuPont Electronics & Communications  
 Wedgwood Way, Stevenage  
 Hertfordshire SG1 4QN  
 United Kingdom  
 Tel: +44 (0) 1438 73 4863

[www.cyrel.eu](http://www.cyrel.eu)

© 2013 DuPont. All rights reserved. The DuPont Oval Logo, DuPont™ and Cyrel® are registered trademarks or trademarks of E.I. du Pont de Nemours and Company or its affiliates. All technical information set out herein is provided free of charge and is based on technical data, which DuPont believes to be reliable. It is intended for use by persons having skill, at their own discretion and risk. The handling precaution information contained herein is given with the understanding that those using it will satisfy themselves that their particular conditions of use present no health or safety hazards. Since conditions of product use are outside of our control we make no warranties express or implied in relation thereto and therefore cannot accept any liability in connection with any use of this information. Nothing herein is to be taken as a license to operate under, or a recommendation to infringe any patents.