


DuPont™ Cyrel® 3000 ETL-i

State-of-the-Art Exposure Top Lift



DuPont™ Cyrel® 3000 ETL-i

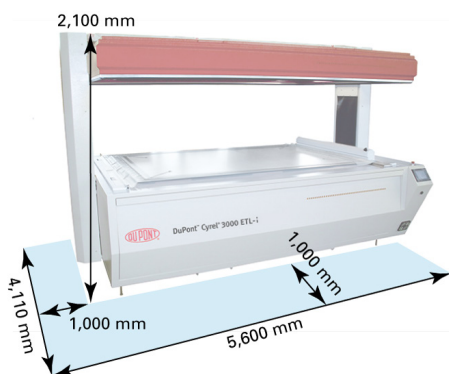

Floor Plan

DuPont Packaging Graphics continues to be a global technology leader in the development and supply of flexographic printing systems. Our R&D team continues to develop innovative new solutions to help our customers expand their business by taking advantage of new and profitable opportunities in the growing flexographic packaging market. The DuPont Packaging Graphics portfolio of products includes DuPont™ Cyrel® brand photopolymer plates (analogue and digital), Cyrel® platemaking equipment, Cyrel® round sleeves, Cyrel® plate mounting systems and the revolutionary Cyrel® FAST thermal system.

DuPont™ Cyrel® Systems: Higher quality at high speed.

The DuPont™ Cyrel® 3000 ETL-i is designed with customer needs in mind; it is easy to install, support, maintain and operate. It is robust, extremely cost effective and reliable.

Benefits

- Maximum plate size 1,320 x 2,030 mm (52" x 80")
- Top Lift design
- Double sided exposure
- Pre-heated back exposure lamps
- 360° plate access
- Optimum productivity

Product Features

DuPont™ Cyrel® 3000 ETL-i exposes high quality photopolymer plates up to a maximum format of 1,320 x 2,030 mm (52" x 80").

The automatic lifting of the exposure lid allows easy and convenient 360° access to the exposure bed and photopolymer plate. This 360° access simplifies cleaning and adjusting of negatives and increases efficiency.

The main exposure is performed with 44 UV-A fluorescent tubes with built-in reflectors that are located in the top lid. The user can customise up to 20 basic exposure set ups through the touch screen control panel.

The exposure unit also features programmable back exposures. To perform the back and main exposure, it is not required to flip the photopolymer plates. The back exposure is performed with 46 UV-A fluorescent tubes with built-in reflectors that are located underneath the exposure glass plate. Unique to this equipment is the pre-heating exposure section which translates into predictable and consistent back exposures.

Two yellow control tubes are used to illuminate the exposure bed while performing inspection of the plate surface.





DuPont™ Cyrel® 3000 ETL-i

State-of-the-Art Exposure Top Lift

Technical Data		
General	Details	Other Notes
Equipment Name	DuPont™ Cyrel® 3000 ETL-i	Double side exposure frame including punch
SAP Article Number	D14092321	
Max. Nominal Plate Width	1,320 mm (52")	
Max. Nominal Plate Length	2,030 mm (80")	
UV-A Tubes Wave Length	360 nm – 380 nm	44 tubes top section (main exposure) 46 tubes bottom section (back exposure)
UV-C Tubes Wave Length	NA	
Electrical (Field Configurable)	400 Volt – 50 / 60 hz (+10%–5%) 230 Volt – 50 / 60 hz (+10%–5%)	3Ph / N / PE 3Ph / PE
Power (Nominal)	12 kW	
Current (Nominal Load)	20 Amp @ 400 Volt 30 Amp @ 230 Volt	
Connecting Wires	400 Volt configuration 230 Volt configuration	5 x 6 mm ² 4 x 6 mm ²
Grounding	≤ 0.1 Ω	Ground bar to equipment frame and to electrical supply ground
Exhaust	NA	
Environmental Data	Temperature range: 17°C to 28°C (63°F to 82°F)	Relative humidity below 55%
Compressed Air Required	7 Bar (100 PSI)	
Dimensions	Uncrated	Crated
D	2,180 mm (85.8")	2,280 mm (89.8")
W	3,300 mm (129.9")	3,510 mm (138.2")
H	2,140 mm (84.3")	2,450 mm (96.5")
Weight	1,420 kg (3,131 lbs)	2,300 kg (5,071 lbs)
Colour	DuPont Grey & DuPont Red	

For more information on DuPont™ Cyrel® or other DuPont Packaging Graphics products, please contact your local representative:

DuPont de Nemours (Deutschland) GmbH
 DuPont Electronics & Communications
 Hugenottenallee 175
 63263 Neu-Isenburg
 Germany
 Tel: +49 (0) 6102 18 1592

DuPont (U.K.) Limited
 DuPont Electronics & Communications
 Wedgwood Way, Stevenage
 Hertfordshire SG1 4QN
 United Kingdom
 Tel: +44 (0) 1438 73 4863

www.cyrel.eu

© 2013 DuPont. All rights reserved. The DuPont Oval Logo, DuPont™ and Cyrel® are registered trademarks or trademarks of E.I. du Pont de Nemours and Company or its affiliates. All technical information set out herein is provided free of charge and is based on technical data, which DuPont believes to be reliable. It is intended for use by persons having skill, at their own discretion and risk. The handling precaution information contained herein is given with the understanding that those using it will satisfy themselves that their particular conditions of use present no health or safety hazards. Since conditions of product use are outside of our control we make no warranties express or implied in relation thereto and therefore cannot accept any liability in connection with any use of this information. Nothing herein is to be taken as a license to operate under, or a recommendation to infringe any patents.